



UNIVERSITI PUTRA MALAYSIA

**DEVELOPMENT OF A COMPUTER PROGRAMME FOR THE STATIC
ANALYSIS OF JACKET OFFSHORE STRUCTURES SUBJECTED TO
WAVE AND CURRENT LOADING**

SAMSUL IMRAN BIN BAHROM.

FK 2006 56

**DEVELOPMENT OF A COMPUTER PROGRAMME FOR THE STATIC
ANALYSIS OF JACKET OFFSHORE STRUCTURES SUBJECTED TO
WAVE AND CURRENT LOADING**

By

SAMSUL IMRAN BIN BAHROM

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Partial Fulfilment of the Requirement for the Degree of Master of Science**

April 2006



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in partial fulfilment of the requirement for the degree of Master of Science

**DEVELOPMENT OF A COMPUTER PROGRAMME FOR THE STATIC
ANALYSIS OF JACKET OFFSHORE STRUCTURES SUBJECTED TO
WAVE AND CURRENT LOADING**

By

SAMSUL IMRAN BIN BAHROM

April 2006

Chairman : Associate Professor Jamaloddin Noorzaei, PhD

Faculty : Engineering

Jacket structures are the most commonly used type of offshore structure in the world for oil and gas development. This thesis is concerned with the static response of a typical jacket structure subjected to wave and current forces using an innovative physical model of the soil-foundation-structure system. The motivation is to demonstrate the applicability of using a coupled finite-infinite element formulation to represent the far field media of the soil for offshore structural analysis.

Techniques to represent the environmental load and the physical model for static analyses of fixed slender offshore structures are reviewed. Based on the techniques suitable for engineering purposes, a computer code for calculating wave and current forces is written and its implementation into an existing multi-element finite element programme is outlined. For comparison purposes, the developed programmes are checked against a commercial software package through several model tests.

The range and versatility of the coupled programme is demonstrated through structural analyses of a typical jacket structure. The effects of different wave parameters, load combinations and a comparison of structural response assuming i) fixity at the base and ii) flexibility of elastic foundations are studied in detail with respect to displacements, axial forces and bending moments. The advantages and potential of using a coupled finite-infinite formulation for physical representation of the soil for offshore structural analysis are also pointed out and discussed.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi sebahagian keperluan untuk ijazah Master Sains

**PEMBANGUNAN ATURCARA KOMPUTER UNTUK ANALISA STATIK
STRUKTUR JAKET LUAR PANTAI TERDEDIAH KEPADA BEBAN
OMBAK DAN ARUS**

Oleh

SAMSUL IMRAN BIN BAHROM

April 2006

Pengerusi : Profesor Madya Jamaloddin Noorzaei, PhD

Fakulti : Kejuruteraan

Struktur jaket adalah struktur yang paling biasa digunakan untuk pembangunan luar pantai. Tesis ini adalah berkenaan dengan reaksi statik sebuah struktur jaket tipikal yang terdedah kepada daya ombak dan arus dengan menggunakan model fizikal tanah-asas-struktur yang inovatif. Dorongannya adalah untuk menunjukkan keterterapan menggunakan pasangan formulasi unsur terhingga-tak terhingga untuk mewakili media jauh tanah kepada analisa struktur luar pantai.

Kaedah-kaedah untuk mewakili beban persekitaran untuk analisa statik serta cara-cara untuk memodelkan system struktur luar pantai jenis teguh telah dipertimbangkan semula. Berdasarkan kaedah-kaedah yang sesuai untuk kegunaan kejuruteraan, sebuah aturcara komputer untuk mengira daya ombak dan arus telah ditulis. Percantumannya ke dalam sebuah aturcara unsur terhingga-pelbagai juga telah dijelaskan. Untuk tujuan perbandingan, aturcara-aturcara yang dibangunkan ini telah diperiksa ketepatannya dengan sebuah pakej aturcara komersil.

Kebolehan serta julat aturcara yang dicantumkan itu telah ditunjukkan melalui analisa sebuah struktur jaket yang tipikal. Kesan-kesan parameter ombak, kombinasi beban serta perbandingan respons struktur dengan andaian i) kaki struktur adalah teguh ditapaknya dan ii) kefleksibelan asas diambilkira, telah dikaji dengan teliti dari segi pesongan, daya paksi serta momen lentur. Faedah serta potensi menggunakan pasangan formulasi unsur terhingga-tak terhingga bagi mewakili media tanah untuk analisa struktur luar pantai juga telah ditunjukkan dan dibincangkan.

ACKNOWLEDGEMENTS

I would like to express my sincerest gratitude and appreciation to my advisor, Assc. Prof. Dr. Jamaloddin Noorzaei, for his attention, invaluable guidance and for providing me with inspiration and motivation during the course of this study. Special thanks also go to my supervisors, Assc. Prof. Ir. Dr. Mohd. Saleh Jaafar, Prof. Dr. Waleed A.M. Thanoon and Assc. Prof. Dr. Shahrin Mohammad for always being accessible with friendly support.

I am grateful to Prof. Dr. J.R Chaplin (Southampton University, UK) for his helpful comments during the initial stages of this work. I am also grateful to Ir. Rafee Makbol (PhD candidate at Imperial College, UK) for providing the details of the structure used in this study and Mr. Shaharuddin Ismail (Senior Structural Engineer at MMC Oil and Gas) for making the SACS computer software available without which this study would have been exceptionally difficult.

Many people have helped me at various stages of this work, especially from the postgraduate room (too many to mention!). I would also like to extend my deepest gratitude to Mr. Khaled Bayagoob for his assistance in the initial programming aspects of this study. A global thanks to all my friends, especially: Johann, Khalid, Iskandar, Meor, Shairanizan and Zuhairin for your enjoyable company. To Haris, Adam and Hairol, I also thank you for your generous assistance.

Finally, my deepest thanks are given to my family for their continuous support, encouragement and prayers. It is to them that I dedicate this work.


I certify that an Examination Committee has met on 20th April 2006 to conduct the final examination of Samsul Imran bin Bahrom on his Master of Science thesis entitled "Development of a Computer Programme for the Static Analysis of Jacket Offshore Structures Subjected to Wave and Current Loading" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

Ir. Abang Abdullah Abang Ali, MS
Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Abdel Magid S. Hamouda, PhD
Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Bujang Kim Huat, PhD
Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Ir. Abd. Khalim Abd. Rashid, PhD
Associate Professor
Faculty of Engineering
Universiti Kebangsaan Malaysia
(External Examiner)


HASANAH M. GHAZALI, PhD
Professor/Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 11 JUL 2006


This thesis submitted to the Senate of Universiti Putra Malaysia and has been accepted as partial fulfilment of the requirements for the degree of Master of Science. The members of the Supervisory Committee are as follows:

Jamaloddin Noorzaei, PhD
Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Ir. Mohd. Saleh Jaafar, PhD
Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Waleed A.M. Thanoon, PhD
Professor
Faculty of Engineering
Universiti Teknologi Petronas
(Member)

Shahrin Mohammad, PhD
Associate Professor
Faculty of Civil Engineering
Universiti Teknologi Malaysia
(Member)



AINI IDERIS, PhD
Professor / Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 10 AUG 2006

DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



SAMSUL IMRAN BIN BAHROM

Date: 11th September 2006

TABLE OF CONTENTS

	Page
ABSTRACT	ii
ABSTRAK	iv
ACKNOWLEDGEMENTS	vi
APPROVAL	vii
DECLARATION	ix
TABLE OF CONTENTS	x
LIST OF TABLES	xiii
LIST OF FIGURES	xv

CHAPTER

1	INTRODUCTION	
1.1	General	1.1
1.2	Classes of offshore structures	1.2
1.2.1	Jack-up units	1.2
1.2.2	Jacket platforms	1.3
1.2.3	Gravity platforms	1.4
1.2.4	Tension leg platforms	1.5
1.3	Offshore structures in Malaysia	1.6
1.4	Statement of the problem	1.7
1.5	Objectives of the present study	1.8
1.6	Scope of work	1.9
1.7	Assumptions and limitations	1.9
1.8	Organization of the thesis	1.10
 2	 LITERATURE REVIEW	
2.1	General	2.1
2.2	Engineering solutions for representing fluid loading	2.2
2.2.1	Wave theories	2.2
2.2.2	Force calculation models	2.5
2.3	Static analysis of fixed offshore structures	2.7
2.4	Finite element idealization of offshore soil-foundation-structural systems	2.11
2.4.1	Idealization of the substructure	2.11
2.4.2	Idealization of the soil-pile system	2.14
2.5	Concluding remarks and justification of the problem	2.18
 3	 METHODOLOGY (PART 1): FORMULATION OF ENVIRONMENTAL LOADING, COMPUTATIONAL CODING AND VERIFICATION OF WAVELOAD	
3.1	General	3.1
3.2	Formulation of wave theories	3.2
3.2.1	Airy's linear wave theory	3.4
3.2.2	Stokes' fifth order wave theory	3.5

3.2.3	Validity of wave theories	3.7
3.3	Wave forces	3.8
3.3.1	The Morison equation	3.8
3.3.2	Wave forces on arbitrarily oriented cylinders	3.9
3.3.3	Effect of marine growth	3.10
3.4	Self weight and buoyancy	3.11
3.5	Current velocity	3.12
3.6	Wind loading	3.13
3.7	Fixed end actions and equivalent nodal waves forces	3.13
3.8	Computational coding of WAVELOAD	3.16
3.8.1	Discussion on the subroutine WAVESEARCH	3.18
3.8.2	Discussion on the subroutine NODEFORCE	3.20
3.9	Verification of WAVELOAD	3.20
3.9.1	Load discretization by SACS	3.21
3.9.2	Load discretization by WAVELOAD	3.21
3.9.3	Numerical example I – problem definition	3.22
3.9.4	Results and discussion on numerical example I	3.23
3.9.5	Numerical example II – problem definition	3.28
3.9.6	Results and discussion on numerical example II	3.29
3.10	Concluding remarks	3.33
4	METHODOLOGY (PART 2): FINITE ELEMENT FORMULATION, DEVELOPMENT AND VERIFICATION OF OFFSHORE-FEA	
4.1	General	4.1
4.2	Physical modelling of soil-foundation-structure system	4.1
4.3	Two-noded tubular space beam element	4.2
4.3.1	Element stiffness matrix in local axes	4.2
4.3.2	Element stiffness matrix in global axes	4.3
4.4	Direct stiffness method	4.4
4.4.1	Formation of the joint stiffness matrix	4.5
4.4.2	Formation of the joint load vector	4.5
4.4.3	Solution for displacements and member end forces	4.5
4.5	Finite element formulation based on energy method	4.6
4.5.1	Eight-noded isoparametric finite element	4.11
4.5.2	Eight-noded isoparametric infinite element	4.11
4.6	Discussion on the development of OFFSHORE-FEA	4.14
4.7	Special features of OFFSHORE-FEA	4.17
4.7.1	Multi element features	4.17
4.7.2	Automatic classification of members	4.17
4.8	Limitations of OFFSHORE-FEA	4.19
4.9	Verification of OFFSHORE-FEA	4.19
4.9.1	Numerical example III – problem definition	4.20
4.9.2	Discussion of the results	4.21
4.10	Concluding remarks	4.30
5	STRUCTURAL ANALYSIS OF A TYPICAL JACKET STRUCTURE	
5.1	General	5.1
5.2	Structure used in analyses	5.2
5.3	Environmental conditions	5.4

5.4	Parametric study on selective wave parameters	5.5
5.4.1	Effect of wave direction	5.5
5.4.2	Analysis at a fixed wave height with varying wave periods	5.10
5.4.3	Analysis at a fixed wave period with varying wave heights	5.15
5.5	Effect of load combination on structural response	5.18
5.5.1	Problem definition	5.18
5.5.2	Load cases	5.19
5.5.3	Displacement of jacket legs	5.22
5.5.4	Axial forces in jacket legs	5.24
5.5.5	Bending moments of jacket legs	5.27
5.6	Coupled finite-infinite element application	5.29
5.6.1	Problem definition	5.29
5.6.2	Idealization of the soil-foundation-structure system	5.29
5.6.3	Comparative study of jacket leg displacements	5.33
5.6.4	Comparative study of axial forces	5.36
5.6.5	Comparative study of bending moments	5.37
5.6.6	Bending moments of foundation members	5.40
5.6.7	Settlements of surrounding soil	5.42
5.6.8	Variation of soil contact pressures	5.45
5.7	Concluding remarks	5.48
6	CONCLUSIONS AND RECOMMENDATIONS	6.1
6.1	Summary	6.2
6.2	Conclusions	6.2
6.2.1	Computer programme	6.2
6.2.2	Wave theories	6.3
6.2.3	Effect of wave and current forces on structural behaviour	6.3
6.2.4	Effect of load combination	6.4
6.2.5	Comparative study assuming fixed legs and foundation flexibility	6.5
6.2.6	Application of coupled finite-infinite formulation	6.5
6.3	Recommendations for further research	6.6
6.3.1	Further considerations of the wave kinematics	6.6
6.3.2	Modelling of structural detail	6.7
6.3.3	Modelling of soil	6.8
	REFERENCES	R.1
	APPENDIX	A.1
	BIODATA OF THE AUTHOR	B.1

LIST OF TABLES

Table	Page
2.1 Percentage errors in water particle velocities from different wave theories compared with model test data (after Patel, 1989)	2.3
2.2 Wave load calculation methods (after Henderson et al., 2003)	2.6
3.1 Comparison of wavenumber and wavelength arising from Airy's linear theory	3.24
3.2 Comparison of wavenumber and wavelength arising from Stokes' fifth order theory	3.26
4.1 Mapping / shape functions for 3-D isoparametric infinite elements	4.12
4.2 Values of ξ at various nodes	4.13
4.3 Element library for OFFSHORE-FEA	4.17
4.4 Comparison of F_x and M_z arising from Airy's linear theory	4.26
4.5 Comparison of F_x and M_z arising from Stokes' fifth order theory	4.26
4.6 Comparison of F_x and M_z arising from a combined load case	4.27
5.1 Marine growth zone description (Technip, 2001)	5.5
5.2 Variation of d/gT^2 and H/gT^2 for analysis at a fixed wave height	5.10
5.3 Values of horizontal nodal forces along leg A arising from different wave periods	5.14
5.4 Variation of d/gT^2 and H/gT^2 for analysis at a fixed wave period	5.15
5.5 Values of horizontal nodal forces along leg A arising from different wave heights	5.18
5.6 Summary of load cases	5.22
5.7 Axial forces in the jacket legs arising from selective load cases	5.25
5.8 Bending moments for jacket legs arising from selective load cases	5.27
5.9 Soil properties at different layers	5.33
5.10 Comparison of axial forces in jacket legs	5.38

5.11	Comparison of bending moments of jacket legs	5.39
5.12	Settlements of soil along jacket foundations	5.42

LIST OF FIGURES

Figure	Page
1.1 A typical three legged jack-up rig (after Martin, 1994)	1.3
1.2 A typical jacket-type platform (after Patel, 1989)	1.4
1.3 A typical concrete gravity platform (after Ngo-Tran, 1996)	1.5
1.4 Hutton tension leg platform (after Rajabi et al., 1985)	1.6
2.1 Investigative problem areas for jacket structures (modified from Watt, 1978)	2.2
2.2 Wave profiles for Stokes' fifth order and Airy waves (Ditlevsen, 2002)	2.4
2.3 Representation of wave kinematics by Wheeler stretching (after Manuel, 1993)	2.4
2.4 Flow diagram of design process (after Reddy et al., 1991b)	2.8
2.5 Interfacing of modules for the analysis of structures supported on piles (Sundararajan et al., 1980)	2.9
2.6 Variation of total base shear for different wave periods at a wave height of 13 m (Williams et al., 1998)	2.10
2.7 Influence of foundation fixity on leg bending moments (Chaudhry, 1994)	2.10
2.8 Typical modeling of a jacket structure (after Barltrop et al., 1991)	2.11
2.9 Stick model used for jack-up analyses (Thompson, 1996)	2.12
2.10 An idealized deep water jacket (Haver, 1991)	2.13
2.11 Idealized fixed offshore jacket (Rodrigues et al., 2005)	2.13
2.12 Typical structural-foundation model (after Barltrop et al., 1991)	2.15
2.13 Finite element model for the pile-soil foundation system (Penzien et al., 1978)	2.16
2.14 Geometry of finite element mesh (Bransby, 2001)	2.17
3.1 Environmental loadings on an offshore structure (modified from Manuel, 1993)	3.1

3.2	Definition sketch for progressive waves used in the present study	3.2
3.3	Validity of wave theories (API, 2000)	3.8
3.4	Definition sketch for an inclined cylinder (after Sarpkaya et al., 1981)	3.9
3.5	Current velocity profile (After Dawson, 1983)	3.12
3.6	Fixed end actions arising from a uniformly distributed load on a portion of a member (modified from Ghali et al., 1997)	3.14
3.7	Fixed end actions arising from a force along a member (modified from Weaver et al., 1986)	3.14
3.8	Fixed end actions for a member	3.15
3.9	Computational flowchart of a wave load calculation programme (WAVELOAD)	3.17
3.10	Illustration of wave stepping (after Sundarajan et al., 1980)	3.18
3.11	a) Discretization of load distribution by WAVELOAD for ten segments b) A possible discretization of load distribution by SACS for ten segments	3.22
3.12	Definition sketch for numerical example I	3.23
3.13	Distribution of forces arising from Airy's linear theory for different phase angles predicted by WAVELOAD and SACS	3.24
3.14	Distribution of forces arising from Stokes' fifth order theory for different phase angles predicted by WAVELOAD and SACS	3.25
3.15	Surface elevation arising from Airy's linear theory at different phase angles	3.27
3.16	Surface elevation arising from Stokes' fifth order theory at different phase angles	3.27
3.17	Definition sketch for numerical example II	3.28
3.18	Distribution of forces arising from Airy's linear theory for different phase angles predicted by WAVELOAD and SACS	3.30
3.19	Distribution of forces arising from Stokes' fifth order theory for different phase angles predicted by WAVELOAD and SACS	3.31

3.20	Comparison of surface elevation arising from Airy's linear theory for a vertical and inclined member	3.32
3.21	Comparison of surface elevation arising from Stokes' fifth order theory for a vertical and inclined member	3.33
4.1	Three-dimensional space beam element (after Krishnamoorthy, 1988)	4.1
4.2	A general three-dimensional body	4.7
4.3	Eight-noded isoparametric brick element	4.11
4.4	Flow chart of a multi element, multi degrees of freedom 3-D finite element code for analysis of jacket offshore structures (OFFSHORE-FEA)	4.16
4.5	Ideal conditions for automatic member classification for OFFSHORE-FEA	4.18
4.6	Conditions not suitable for automatic member classification for OFFSHORE-FEA	4.19
4.7	Finite element idealization of a simple offshore structure (after Dawson, 1983)	4.20
4.8	Variation of shear force arising from Airy's linear theory for different phase angles	4.22
4.9	Variation of shear force arising from Stokes' fifth order theory for different phase angles	4.22
4.10	Comparison of displacements arising from Airy's linear theory	4.24
4.11	Comparison of displacements arising from Stokes' fifth order theory	4.24
4.12	Deflected profile of the structure	4.25
4.13	Comparison of maximum wave and current forces arising from different wave directions	4.29
5.1	Finite element idealization of 'Bintang A'	5.3
5.2	Plan view of 'Bintang A'	5.4
5.3	Variation of wave and current forces arising from different wave directions	5.6
5.4	Effect of wave direction towards top nodal displacements of jacket legs	5.8

5.5	Global displacements due to different wave directions	5.9
5.6	Variation of maximum shear arising from different wave periods	5.12
5.7	Variation of surface elevation arising from different wave periods	5.12
5.8	Variation of horizontal top nodal displacements of jacket legs arising from different wave periods	5.14
5.9	Variation of maximum shear with increasing wave height	5.16
5.10	Variation surface elevation arising from different wave heights	5.17
5.11	Variation of horizontal top nodal displacement of jacket legs arising from different wave heights	5.18
5.12	Wave and current forces arising from different phase angles	5.20
5.13	Variation of horizontal displacements along jacket legs arising from different load cases	5.23
5.14	Side view of the soil-foundation-structure mesh	5.31
5.15	Front view of the soil-foundation-structure mesh	5.32
5.16	Plan view of the soil-foundation-structure mesh	5.32
5.17	Variation of horizontal displacements along jacket legs including foundations arising from different load cases	5.35
5.18	Global displacements of the soil-foundation-structure mesh	5.36
5.19	Bending moments for jacket foundations arising from various load Cases	5.41
5.20	Nodal points for jacket foundations	5.42
5.21	Settlements of various soil layers along section A-A	5.43
5.22	Displacements of the topmost layer of soil arising from load case 1	5.44
5.23	Displacements of the topmost layer of soil arising from load case 5	5.45
5.24	Variation of vertical stresses in the soil along jacket foundations arising from different load cases	5.47
5.25	Variation of soil surface stresses	5.48

CHAPTER 1

INTRODUCTION

1.1 General

Offshore technology has experienced a remarkable growth since the late 1940's, when offshore drilling was first used in the Gulf of Mexico. At the present time, a wide variety of offshore structures are being used, even under severe environmental conditions. These are primarily related to oil and gas recovery, but they are also used in other applications such as in harbour engineering and accommodation facilities (Reddy et al., 1991a). Difficulties in design and construction are considerable, particularly as structures are being located in ever increasing depths and are subjected to extremely hostile environmental conditions.

Offshore structures are quite different than those found onshore on account of sitting, size, forces acting on them and the nature of their foundations. The depth of water, foundation characteristics, and the nature and the size of the equipment to be installed on the platform deck determine the type, size and dimensions of the structure to be constructed. The components that make up any offshore structure could be classified as (Reddy et al., 1991a):

- 1) Superstructure – Houses the deck and functional equipment such as drilling equipment, processing plant, helicopter pad, personnel quarters etc.
- 2) Substructure – Supports the working space and transmits the load from the working space to the supporting foundation.



- 3) Foundation – Supports the sub and superstructure and transmits the load to the soil and hard rock beneath.

1.2 Classes of offshore structures

Before proceeding to describe the content of this thesis, it is appropriate to classify briefly, the wide variety of offshore structures that are in current use. The major offshore structures used in the various stages of oil recovery include mobile and fixed drilling platforms, as well as a variety of supply, work and support vessels (Sarpkaya et al., 1981). Ships and ship like marine vessels are also used extensively, but they are treated within the field of naval architecture and are not of primary concern in the present study.

1.2.1 Jack-up units

Jack-up units are mobile exploratory drilling rigs, usually for drilling oil and gas wells in water depths up to about 100 m (Ngo-Tran, 1996). A jack-up rig usually comprises of three legs that can be moved up or down as shown in Figure 1.1. The rig is floated to the well site with its legs elevated and when it reaches the site, the legs are lowered and jacked into the sea bottom to produce a foundation. A process of preloading is then started with water being pumped into ballast tanks in the hull, forcing the footings to penetrate deeper into the seabed. Once the ballast tanks are emptied, the hull is jacked to its operational elevation.

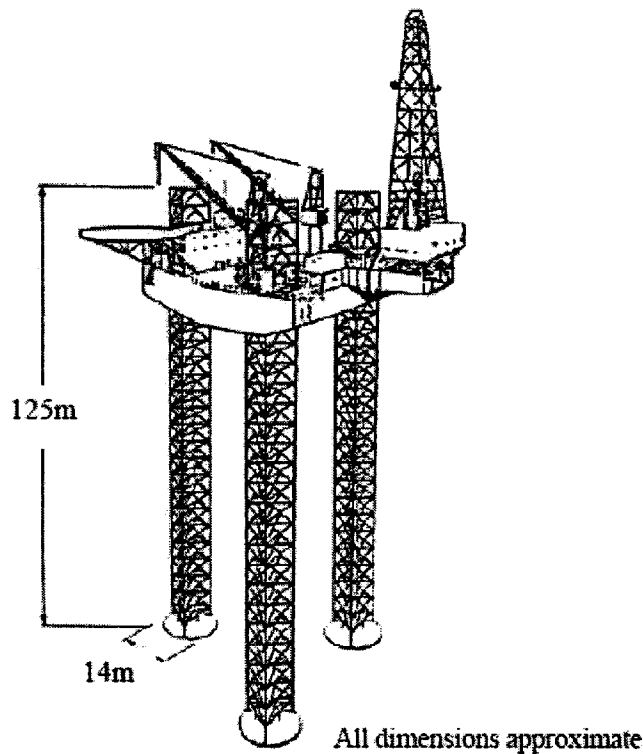


Figure 1.1: A typical three-legged jack-up rig (after Martin, 1994)

1.2.2 Jacket platforms

The jacket or template structure and extensions to them are the most common platforms in use (Sarpkaya et al., 1981). Jacket platforms are employed to meet the needs of offshore drilling and production operations. A typical jacket platform comprises of a space frame structure, with pipe piles driven through its legs. The superstructure or “topside” loads are directly taken by the piles and transferred to the soil. These piles must also be able to resist tension as the hydrodynamic forces on the structure have a tendency to cause overturning (Dawson, 1983).

Some jacket platforms may contain enlarged legs to provide for self-buoyancy during installation. Figure 1.2 shows a diagram of such a platform. These structures are

typically built for water depths of 150 to 250 m. One of the world's tallest jacket platforms is the Bullwinkle platform, situated at the Gulf of Mexico in water depth of 492 m (Barltrop et al., 1991).

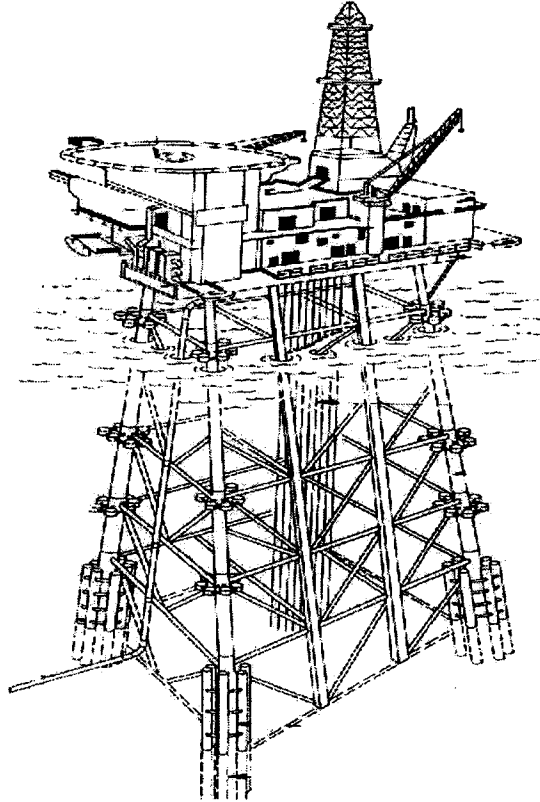


Figure 1.2: A typical jacket-type platform (after Patel, 1989)

1.2.3 Gravity platforms

Gravity platforms depend on their massive weight, rather than on piles, for their stability. They are thus suitable to sites with over-consolidated soils (Sarpkaya et al., 1981). Gravity platforms are usually constructed from concrete, although steel or combinations of both steel and concrete have also been used. The most familiar gravity platforms are comprised of a large base, which has the capacity for significant oil storage, and which supports a few columns as illustrated in Figure 1.3. A typical gravity platform may have a base diameter of 90 to 120 m, and have

the capacity to store 1 million barrels of oil. Gravity structures can weigh over 850,000 tones and have been placed in water depths varying from 70 to 350 m (Reddy et al., 1991a).

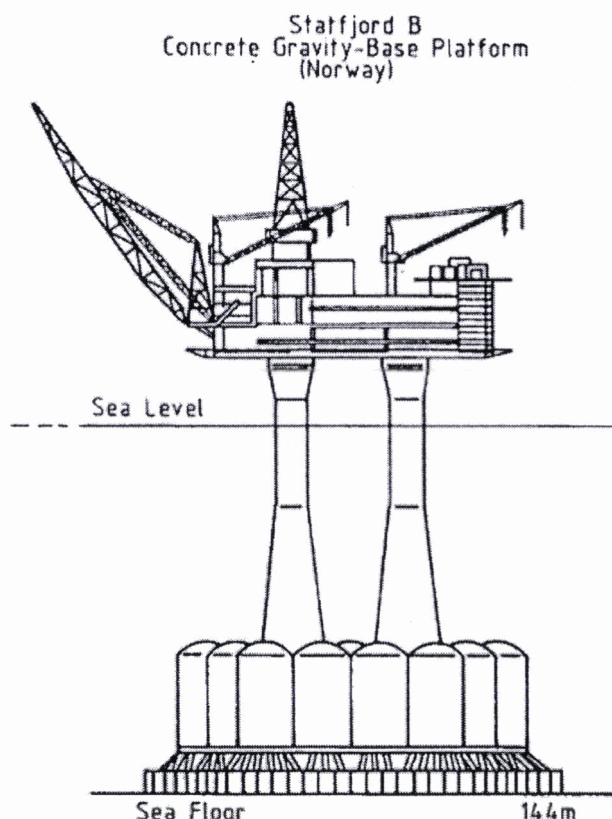


Figure 1.3: A typical concrete gravity platform (after Ngo-Tran, 1996)

1.2.4 Tension leg platforms

As offshore development moved beyond 300 m water depths, newer concepts for deep-water platform have evolved. Tension leg platforms, articulated towers and Guyed towers emerged as structures suitable for large water depths. All these structures are compliant, which is they move slightly with the waves instead of being rigid with respect to the wave forces. The tension leg platform (TLP) concept is a development of the semi submersible concept, in which heave, pitch, and roll

responses are virtually eliminated while the platform is fairly free to move in the horizontal plane. TLPs could be anchored by a gravity base, driven piles or drilled and grouted piles. TLPs have been designed for water depths varying from 150 to 1500 m (Rajabi et al., 1985).

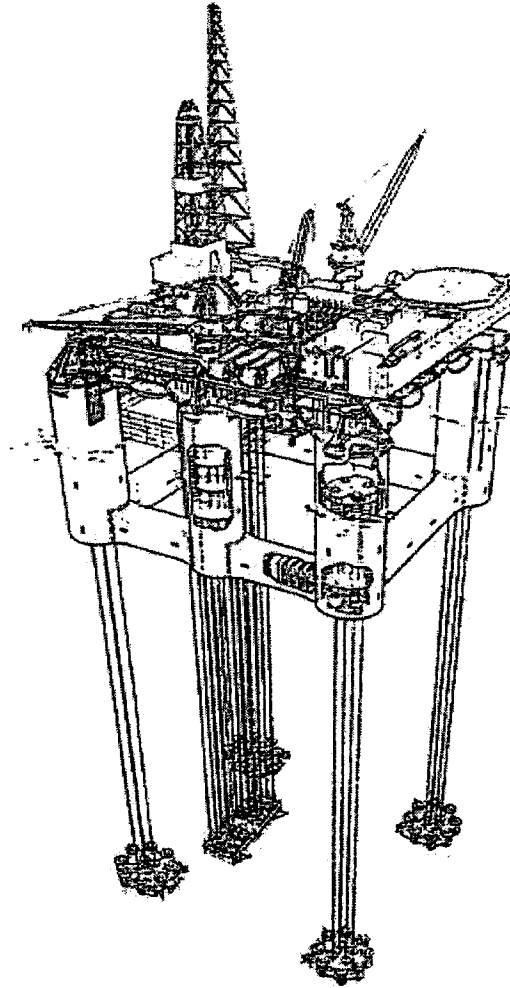


Figure 1.4: Hutton tension leg platform (after Rajabi et al., 1985)

1.3 Offshore structures in Malaysia

Malaysia's oil gas deposits are situated mainly offshore the states of Sabah and Sarawak (East Malaysia) and offshore the east coast of Peninsula Malaysia. Petroleum exploration of offshore Malaysia began in the 1950s with the introduction